Advance
Advolution™ 20 & 20XP

Cord Electric Burnishers

DEFINING
CLEANING
INNOVATION

Consistent, High Gloss Performance
with Easy Performance

Advance
by Nilfisk-Advance

Advance Advolution™ 20 & 20XP

Cord Electric Burnishers

20 inch High Performance Burnishers

The Advolution™ 20 and 20XP cord-electric burnishers from Advance are designed to maximize performance, productivity, and operator ease. Both models feature the unique Flex Floor™ Technology – based on a patented, pintle-mounted motor design – that enables the motor to pivot and hug the contours of the floor's surface. The Advolution™ also utilizes a patented gas spring technology that precisely regulates the head pressure for a maximum shine on floor surfaces, regardless of the operator's previous burnisher experience. This exclusive patent also enables the machine to be smaller, more maneuverable, and requires virtually no training.

Advance had uncompromised facility safety in mind when it added a 75 foot safety yellow, SuperFlex™ cord and a hospital-grade plug. The SuperFlex™ cord is secured with a quick-release rotating cord hook which allows the operator to release all 75 feet of the cord at once to save time and effort. Another key safety feature is the SafeStart™ function which requires the handle to be in the operating position before the machine can be started. This helps to prevent unmanned use of the burnisher. Operating at less than 67 dB A, the volume of standard conversation, the Advolution 20 & 20XP burnishers are perfect for daytime burnishing.

The space-saving EZ Store™ handle minimizes the storage space necessary for the Advolution 20 & 20XP burnishers. While in the EZ Store™ space-saving position, the operator has easy access to check wear or replace the burnishing pad.

The Advolution 20 has a 20 inch burnishing surface which runs at 1,500 rpm. The Advolution 20XP is a 20 inch dust control model that runs at 2,000 rpm. The powerful suction on the Advolution 20XP sends all of the burnishing dust into the unit's dual-port dust bag and not into the air. This provides total dust control for improved indoor air quality, while operating at higher speeds, to protect the health of the operators and facility occupants. When using the Advolution 20XP, operator productivity is increased by eliminating the need for dust mopping after burnishing.

Ideal Applications Include —

- Healthcare Facilities
- Hotels/Hospitality
- Schools
- Religious Facilities
- Government Facilities
- Grocery Stores
- Retail Facilities

VALUE FEATURES

EZ Store™ construction allows the Advance Advolution 20 and 20XP to be stored in the smallest of cleaning closets

- Patented design enables machine to be more maneuverable and easier to train on
- The direct drive transmission eliminates adjustment of noisy belts, bearings and pulleys
- Rotomolded body provides lasting durability
- Low sound level permits operation anywhere anytime

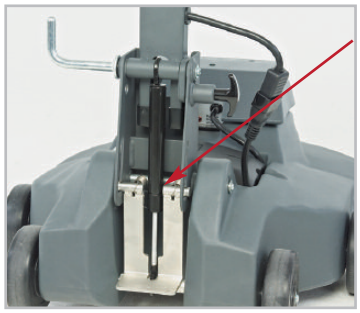

Patented gas spring technology provides for consistent results regardless of the operator

Simple, one step handle release

Rotomolded body provides lasting durability. Dust bags are easy to access



Carbon brush indicator lights red when brushes need to be replaced

Red SafeStart™ button only operates in operator position

Rotating cord hook lets 75 feet of cord be removed at one time

VALUE FEATURES

EZ Store™ construction makes for easy pad changing

High Performance 20 inch Cord Electric Burnishers with Premium Features

Defining Cleaning Innovation…

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.

Nilfisk *Genuine OEM Parts*

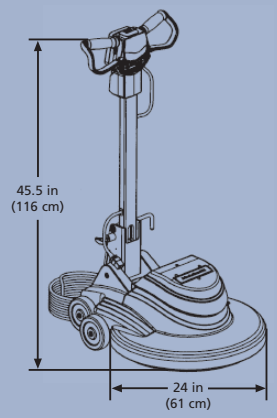

Standard Features

- Flex Floor Technology
- 75 foot Safety Yellow SuperFlex Cord
- EZ Store™ Folding Handle
- Dual Port Dust Bag (20XP)
- Rotating Cord Hook

Technical Specifications

Model	Advolution™ 20	Advolution™ 20XP
Angle Activated Safety Switch	Yes	Yes
Safety Yellow Cord	Yes	Yes
Hospital Grade Plug	Yes	Yes
Maintenance Free Transmission	Yes	Yes
Motor Protection Indicator Light	Yes	Yes
Folding Handle	Yes	Yes
Factory Assembled	Yes	Yes
Sound Level	62.1 dB A	66.5 dB A
Pad Size	20 in	20 in
Pad Speed	1,500 R.P.M.	2,000 R.P.M.
Transmission	Direct Drive	Direct Drive
Construction	Rotomolded	Rotomolded
Motor	1.5 hp	1.5 hp
Cord	75 ft (23 m)	75 ft (23 m)
Height	45.5 in (116 cm)	45.5 in (116 cm)
Width	24 in (61 cm)	24 in (61 cm)
Minimum Depth	16.5 in (42 cm)	16.5 in (42 cm)
Maximum Depth	28 in (71 cm)	32 in (81 cm)
Weight	85 lb (39 kg)	87 lb (39 kg)
Part Number	01510A	01520A

Specifications are subject to change without notice.

Advance
by Nilfisk-Advance

14600 21st Avenue North
Plymouth, MN 55447-3408
www.advance-us.com
Phone: 800-850-5559
Fax: 800-989-6566

396 Watline Avenue
Mississauga, Ontario, Canada L4Z 1X2
www.nilfisk-advance.com
Phone: 800-668-8400 or 905-712-3260
Fax: 800-263-5111 or 905-712-3255

©2007, Nilfisk-Advance, Inc., Printed in U.S.A., Form L3014A 11-07

recyclable